

梯级式电缆桥架选型手册



现代桥架

MODERN CABLE TRAY

XQJ 梯级式电缆桥架

Ladder Type Support


梯级式桥架是根据国外有关技术及我厂产品的特点改进而成，它具有重量轻、成本低、造型别致、通风散热性能好等特点。它适用于一般直径较大的电缆敷设，特别适用于高、低压动力电缆的敷设。

Ladder-type cable support systems are products manufactured at this factory by referring to relevant technical data of other countries and maintaining the characteristics of the original products of this factory. It features small weight, low cost, unique shaping, fine permeability and quick heat dissipation, It is applicable for laying of big-diameter cables, especially high-voltage, low-voltage and power cables.

目录


XQJ-T-01 梯式直通	2
XQJ-T-02 水平弯通	3
XQJ-T-03 水平三通	4
XQJ-T-04 水平四通	5
XQJ-T-05A 垂直凹弯通/XQJ-T-05B 垂直凸弯通	6
XQJ-T-05C 垂直转动弯通	7

XQJ-T-01 梯式直通 XQJ-T-01 Ladder-type straight Cable support

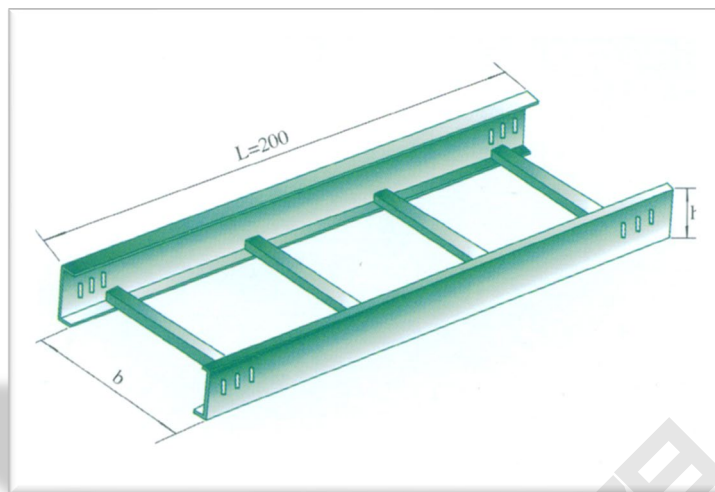

序号 No	型号 Model	b(mm)	h(mm)	重量 (kg) Weight
1	T-01-6-2	200	60	11.40
2	T-01-10-2		100	17.41
3	T-01-15-2		150	25.91
4	T-01-6-3	300	60	12.55
5	T-01-10-3		100	18.59
6	T-01-15-3		150	27.00
7	T-01-6-4	400	60	18.70
8	T-01-10-4		100	22.70
9	T-01-15-4		150	28.22
10	T-01-20-4		200	37.63
11	T-01-6-5	500	60	20.88
12	T-01-10-5		100	23.88
13	T-01-15-5		150	29.38
14	T-01-20-5		200	39.17
15	T-01-6-6	600	60	22.03
16	T-01-10-6		100	25.03
17	T-01-15-6		150	30.53
18	T-01-20-6		200	40.71
19	T-01-6-8	800	60	25.34
20	T-01-10-8		100	27.34
21	T-01-15-8		150	32.84
22	T-01-20-8		200	43.79
说明：高度 h=60.100 为单排连接孔，高 h=150.200 为双排连接孔 Description:h=60.100single-row connection holes;h=150.200double-row connection holes				


XQJ-T-02 水平弯通 XQJ-T-02 Ladder-type horizontal bend

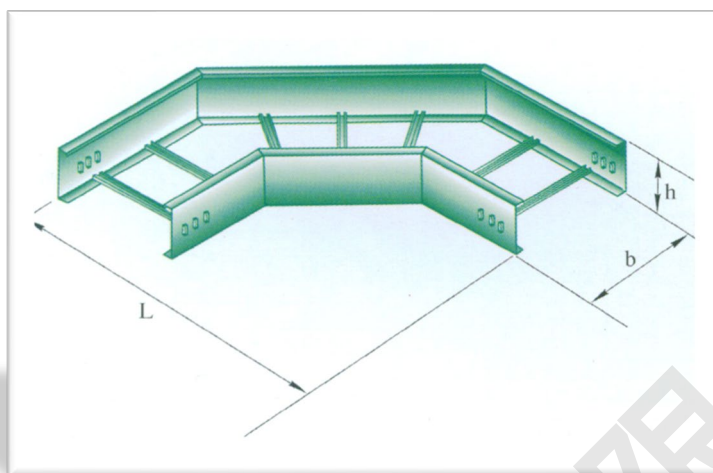

序号 No	型号 Model	b(mm)	h(mm)	L(mm)	重量 (kg) Weight
1	T-02-6-2	200	60	500	5.89
2	T-02-10-2		100		6.96
3	T-02-15-2		150		12.50
4	T-02-6-3	300	60	600	7.46
5	T-02-10-3		100		8.66
6	T-02-15-3		150		14.95
7	T-02-6-4	400	60	700	7.97
8	T-02-10-4		100		9.85
9	T-02-15-4		150		16.72
10	T-02-20-4	500	200	800	22.30
11	T-02-6-5		60		10.53
12	T-02-10-5		100		12.61
13	T-02-15-5	600	150	900	19.40
14	T-02-20-5		200		25.87
15	T-02-6-6		60		12.20
16	T-02-10-6	800	100	1000	14.60
17	T-02-15-6		150		21.40
18	T-02-20-6		200		28.53
19	T-02-6-8	800	60	1100	13.59
20	T-02-10-8		100		16.25
21	T-02-15-8		150		25.40
22	T-02-20-8		200		33.87


说明: 高度 h=60.100 为单排连接孔, 高 h=150.200 为双排连接孔 Description:h=60.100single-row connection holes;h=150.200double-row connection holes

XQJ-T-03 水平三通 XQJ-T-03 Ladder type horizontal Tee

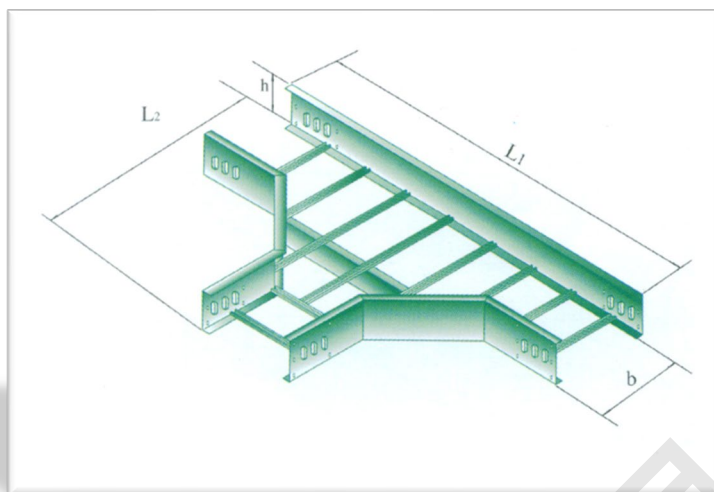

序号 No	型号 Model	b(mm)	h(mm)	L1(mm)	L2(mm)	重量 (kg) Weight
1	T-03-6-2	200	60	800	500	8.08
2	T-03-10-2		100			10.66
3	T-03-15-2		150	1000	19.08	
4	T-03-6-3	300	60	900	600	10.02
5	T-03-10-3		100			12.35
6	T-03-15-3		150	1000	700	21.20
7	T-03-6-4	400	60	1100		12.80
8	T-03-10-4		100			14.56
9	T-03-15-4		150	1200	800	24.04
10	T-03-20-4	200	32.05			
11	T-03-6-5	500	60	1100		900
12	T-03-10-5		100		16.32	
13	T-03-15-5		150	1300	26.07	
14	T-03-20-5	200	34.76			
15	T-03-6-6	600	60	1200		100
16	T-03-10-6		100		18.02	
17	T-03-15-6		150	1400	1100	
18	T-03-20-6	200	37.60			
19	T-03-6-8	800	60		1200	1100
20	T-03-10-8		100	21.58		
21	T-03-15-8		150	1600		1200
22	T-03-20-8		200		40.08	
说明：高度 h=60.100 为单排连接孔，高 h=150.200 为双排连接孔						
Description:h=60.100single-row connection holes;h=150.200double-row connection holes						

XQJ-T-04 水平四通 XQJ-T-04 Ladder type horizontal Cross

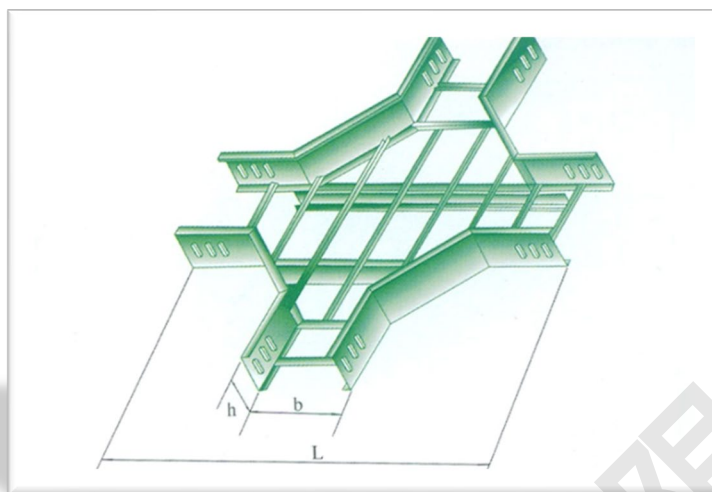


序号 No	型号 Model	b(mm)	h(mm)	L(mm)	重量 (kg) Weight
1	T-04-6-2	200	60	800	11.24
2	T-04-10-2		100		13.50
3	T-04-15-2		150	1000	23.85
4	T-04-6-3	300	60	900	13.61
5	T-04-10-3		100		15.42
6	T-04-15-3		150	1000	25.77
7	T-04-6-4	400	60	1100	15.54
8	T-04-10-4		100		17.88
9	T-04-15-4		150	1200	27.78
10	T-04-20-4	500	200		37.04
11	T-04-6-5		60	1100	17.52
12	T-04-10-5		100		19.89
13	T-04-15-5		150	1300	31.72
14	T-04-20-5		200		39.65
15	T-04-6-6	600	60	1200	20.28
16	T-04-10-6		100		22.78
17	T-04-15-6		150	1400	34.00
18	T-04-20-6	800	200		42.50
19	T-04-6-8		60		24.51
20	T-04-10-8		100		26.94
21	T-04-15-8		150	1600	38.29
22	T-04-20-8		200		47.86

说明: 高度 h=60.100 为单排连接孔, 高 h=150.200 为双排连接孔
 Description:h=60.100single-row connection holes;h=150.200double-row connection holes

XQJ-T-05A 垂直凹弯通 / XQJ-T-05B 垂直凸弯通

XQJ-T-05A Ladder type straight convex bend/XQJ-T-05B Ladder-type straight concave bend straight concave bend

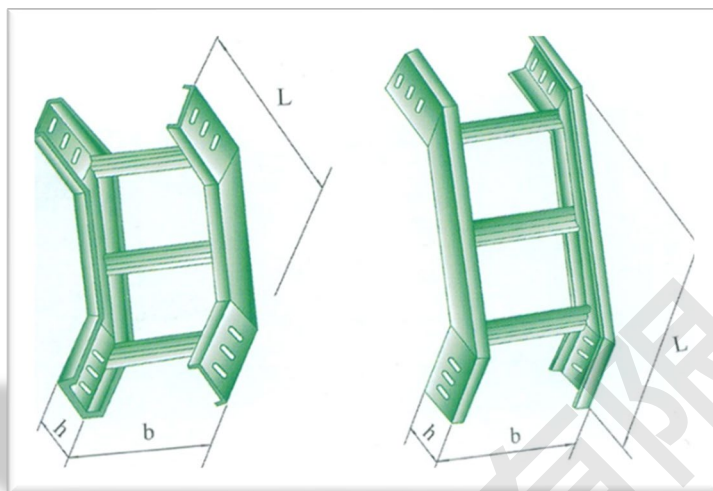


序号 No	型号 Model	b(mm)	h(mm)	L(mm)	重量 (kg) Weight
1	T-05A.B-6-2	200	60	360	7.84
2	T-05A.B-10-2		100	400	5.56
3	T-05A.B-15-2		150	550	10.92
4	T-05A.B-6-3	300	60	360	5.17
5	T-05A.B-10-3		100	400	6.25
6	T-05A.B-15-3		150	550	12.17
7	T-05A.B-6-4	400	60	360	5.36
8	T-05A.B-10-4		100	400	7.05
9	T-05A.B-15-4		150	550	13.69
10	T-05A.B-20-4	500	200	700	24.67
11	T-05A.B-6-5		60	360	5.85
12	T-05A.B-10-5		100	400	7.54
13	T-05A.B-15-5	600	150	550	14.20
14	T-05A.B-20-5		200	700	25.21
15	T-05A.B-6-6		60	360	8.06
16	T-05A.B-10-6	800	100	400	8.80
17	T-05A.B-15-6		150	550	14.69
18	T-05A.B-20-6		200	700	25.73
19	T-05A.B-6-8	800	60	360	7.38
20	T-05A.B-10-8		100	400	9.07
21	T-05A.B-15-8		150	550	15.72
22	T-05A.B-20-8	800	200	700	26.88

说明: 高度 h=60.100 为单排连接孔, 高 h=150.200 为双排连接孔

Description:h=60.100single-row connection holes;h=150.200double-row connection holes

XQJ-T1-05C 垂直转动弯通 Model XQJ-T1-05C Vertical rotatable bend

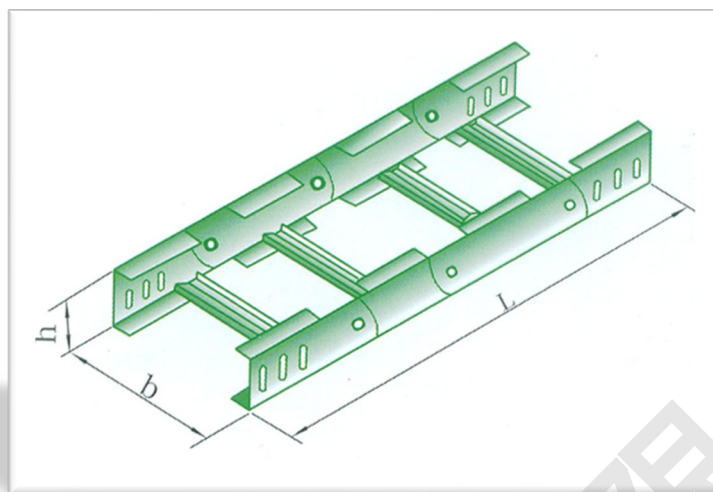

序号 No	型号 Model	b(mm)	h(mm)	L(mm)	重量 (kg) Weight
1	T1-05C-6-2	200	60	780	6.05
2	T1-05C -10-2		100	900	8.52
3	T1-05C -15-2		150	1050	17.97
4	T1-05C -6-3	300	60	780	8.52
5	T1-05C -10-3		100	900	11.08
6	T1-05C -15-3		150	1050	18.59
7	T1-05C 6-4	400	60	780	7.41
8	T1-05C-10-4		100	900	11.20
9	T1-05C -15-4		150	1050	20.81
10	T1-05C -20-4	500	200	1200	31.72
11	T1-05C -6-5		60	780	8.14
12	T1-05C -10-5		100	900	11.25
13	T1-05C-15-5		150	1050	21.49
14	T1-05C -20-5	600	200	1200	32.32
15	T1-05C -6-6		60	780	12.31
16	T1-05C -10-6		100	900	15.32
17	T1-05C -15-6		150	1050	22.97
18	T1-05C -20-6	800	200	1200	33.76
19	T1-05C -6-8		60	780	15.20
20	T1-05C -10-8		100	900	15.87
21	T1-05C -15-8		150	1050	23.52
22	T1-05C -20-8		200	1200	34.46

说明: 高度 h=60.100 为单排连接孔, 高 h=150.200 为双排连接孔
Description:h=60.100single-row connection holes;h=150.200double-row connection holes

